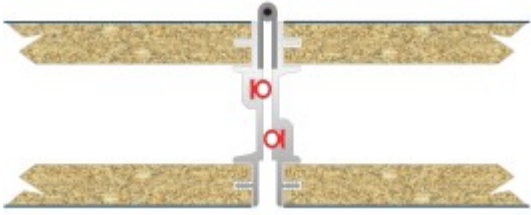
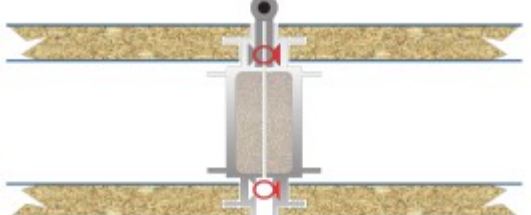
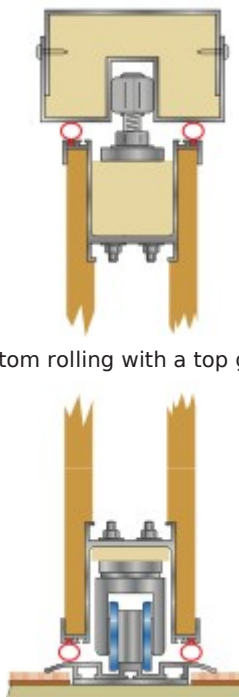
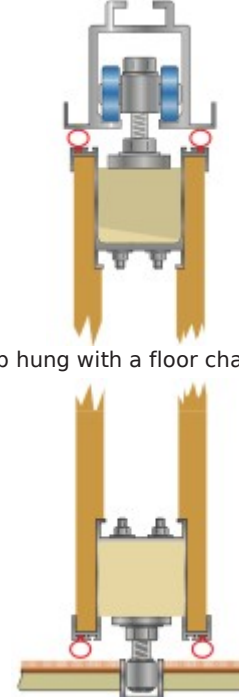


# Multifold Sliding Systems – Technical Information

TY PE	M70	M80
Panel suspension	Floor track and top guide or top hung with floor guide.	Floor track and top guide or top hung with floor guide
Track system	Centre or end fold.	Centre or end fold.
Panel thickness	70mm.	80mm.
Panel height	Up to 3000mm. Heights greater than 3000mm refer to our Technical Department.	
Max height	4000mm.	4000mm.
Panel width	250 – 900mm.	250 – 900mm.
Frame construction	Aluminium / wood.	Aluminium / steel.
Face panel	12mm.	12mm.
Fire safety	Optional Class 1 or O.	Optional Class 1 or O.
Vertical profiles	Aluminium, Anodised with sealing profiles. Full length piano hinges.	Aluminium, anodised with sealing profiles complete with integral hinges.
Top & bottom Sweep seals	Yes.	Yes.
Locking	Flip bolts to floor track.	Espagnolette bolts by operating handle supplied.
Doors	Communicating panel with optional lock.	Communicating panel with optional lock.
Sound insulation	35, 39, 42 dB Rw.	35, 39, 42, 44 dB Rw.
Weight	Approx 35 – 42 Kg/sq M. <i>(depending on sound insulation)</i>	Approx 35 – 44 Kg/sq M. <i>(depending on sound insulation)</i>
Profiles		
Cross section through panels	 <p>Bottom rolling with a top guide</p>	 <p>Top hung with a floor channel</p>

Contact us at:

**Duvale PLC**, Winterpick Business Park, Henfield, West Sussex, BN5 9BJ

F 0870 8720874 E [sales@duvale.plc.uk](mailto:sales@duvale.plc.uk)

T 0870 8720873 W [www.duvale.plc.uk](http://www.duvale.plc.uk)

  
movable wall manufacturers